


→ **Series 40000**

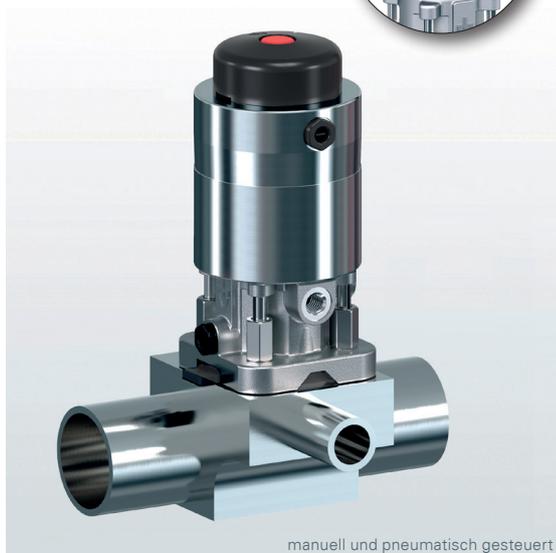

manuell und pneumatisch gesteuert

FDA USP

■ **SPECIFICATION**



Nominal pipe sizes
DN 4 - DN 65



**Temperature range
(operating medium)**
-10 to +100 °C

Sterilisation with saturated steam max. 160°C
depending on sealing material



System pressure
0 - 10 bar



Control pressure
4,5 - 7 bar

■ **SUITABLE FOR**

Liquids	neutral and non-neutral	
Air, gases and vapours	neutral and non-neutral	
Steam		

■ **EXAMPLES OF USE**

Processes, plants and tanks in the food and pharmaceutical industries for neutral and non-neutral vapours, gases and liquids

- Biopharmaceuticals
- Pharmaceutical industry
- Food industry
- Dairies
- Breweries and beverage industry
- Cosmetics industry
- Medical technology
- Clean-Service applications

■ **FEATURES**

- Modular system for customer-specific solutions
- Compact design for confined installation spaces
- Versatile actuator range for specific requirements
- Defined diaphragm compression
- CIP/SIP capable (no retightening of bolts required)
- Controlled exhaust air flow possible
- Extensive adaptation options for accessories and components
- Manual actuators with retrofittable closing and stroke limitation
- Autoclavable (optional)

■ **CONFORMITIES / TESTS**

FDA – Code of Federal Regulations (CFR) Title 21, Section 177.2600/177.1550

USP – Class VI

EG 1935/2004

EU 10/2011

BSE/TSE

EMA/410/01/Rev. 2

■ **MATERIALS**

Component	
Valve body*	available in different materials according to customer specifications
Diaphragms	made of soft elastomer or sandwich construction PTFE with soft elastomer

*Valve body available in various surface finishes.


VALVE BODY

■ BODY DESIGN

Body design: T-valve
Connections: .03
Valve function: .01



D.V

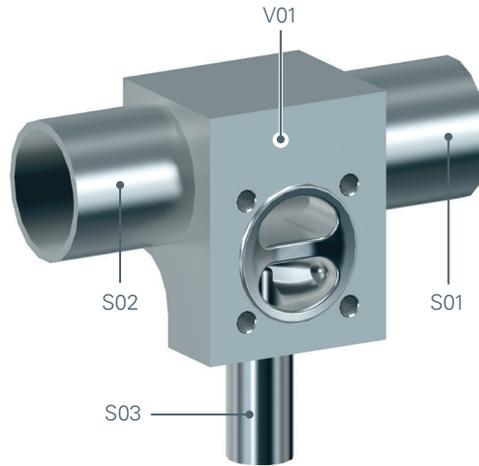

Body design 0301TNL



Actuator



Shut-off diaphragm

■ MATERIAL / VALVE BODY MATERIAL

Material	Code
1.4435 BN 2 (Δ Fe < 0,5%) / 316L ASME BPE DT3	.3L
Other materials on request.	

■ SURFACE FINISH OF VALVE BODY

Inner surface ¹	ASME BPE	Hygiene class DIN11866	Code
Ra < 0.76 Internal surface mechanically polished	SF3	H3	.8N
Ra < 0.64 Internal surface mechanically polished + electro-polished inside and outside	SF6	HE3	.8E
Ra < 0.38 Internal surface mechanically polished	SF1	H4	.4N
Ra < 0.38 Internal surface mechanically polished + electro-polished inside and outside	SF4	HE4	.4E
Ra < 0.25 Internal surface mechanically polished + electro-polished inside and outside	-	HE5	.2E

¹ Surface finishes of custom valve bodies may be restricted in special cases.

Or any other surface finish that meets the Ra value (as per ASME BPE). The minimum Ra value for internal tube diameter < 6 mm is 0.38 µm. With these surfaces, the bodies are marked according to ASME BPE. The surfaces are only available for valve bodies that are not made from investment casting (.3L) and with connections (A...) according to ASME BPE. Not possible for internal diameters <6 mm. Ra according to DIN EN ISO 4288 and ASME B46.1

Others on request.

■ MANUFACTURING METHOD / SEMI-FINISHED PRODUCT

Manufacturing process / Semi-finished product	Code
Solid material body	.V

TUBE CONNECTION (S01/S02/S03)

■ PIPE STANDARD

Standard	Code
ASME-BPE/DIN-11866 R-C	A
BS-4825 Part 1	B
ASME-B36.19M Sch. 10s	C
DIN-11866 R-A (11850 R-2)	D
EN-10357 S-B (DIN 11850 R-1)	E
TBV-Weld area	T
EN-10357 S-B (DIN 11850 R-3)	F
Dairy tube	G
ISO-1127 / DIN 11866 R-B	I
JIS-G 3459	J
JIS-G 3447	K
SMS-3008	S
Others on request.	

■ AVAILABLE NOMINAL DIAMETERS

Nominal diameter DN	4	6	8	10	15	20	25	32	40	50	65
	-	-	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
Code	004	006	008	010	015	020	025	032	040	050	065

■ LENGTH



Length	Code
Standard connection length	N
Short connection length	S
Connection length of welding centring	Z

* see dimension table in technical document 'Body'.

■ CONNECTION

Connection	Code
Weld end	W
Clamp ASME Contour	A
Flange with collar DIN 11864-2 Form A	B
Clamp DIN Contour	D
Flange EN 1092, PN 16, Form B, length FTF EN 558 Series 1, ISO 5752, basic series 1	F
Dairy pipe thread	G
Dairy tube, cone nozzle with union nut	K
Flange with groove DIN 11864-2 Form A	N

Others on request.

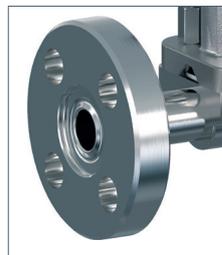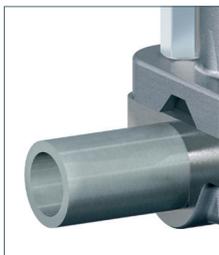

W = Weld end

A = Clamp ASME Contour
D = Clamp DIN Contour

B = Flange with collar
DIN 11864-2 Form A

F = Flange EN 1092,
PN 16, Form B,
length FTF EN 558
Series 1, ISO 5752,
basic series 1

G = Dairy pipe thread

N = Flange with groove
DIN 11864-2 Form A


Example of a connection code: **A015NW**

A = ASME-BPE/DIN-11866 R-C | 015 = Nominal width of connection DN15 | N = Standard connection length | W = Nozzle connection Weld end

DIMENSIONS

SERIES 4000 ■ VALVE BODY DIMENSIONS

T valve

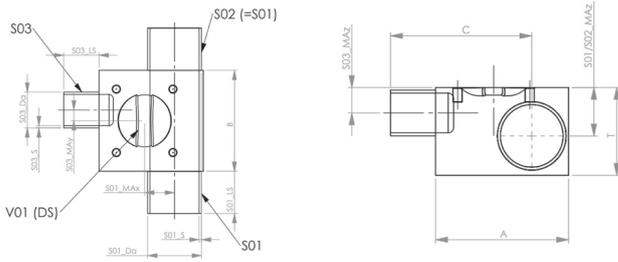

	S01/ S02				S03					A	B	T	Max	Weight [kg]
	Da	S	LS	Max	C	Da	S	LS	Max					


ASME-BPE/DIN-11866 R-C

0301TNL.XX.XX.V_A008NW_A008NW_A008NW_010	6,35	0,89	20,00	9,48	42,23	6,35	0,89	20,00	6,06	4,27	36,20	37,70	13,66	4,13	0,16
0301TNL.XX.XX.V_A010NW_A010NW_A008NW_010	9,53	0,89	20,00	11,07	43,82	6,35	0,89	20,00	6,06	4,27	36,20	37,70	16,84	5,72	0,19
0301TNL.XX.XX.V_A010NW_A010NW_A010NW_010	9,53	0,89	20,00	11,07	43,82	9,53	0,89	20,00	4,47	5,86	36,20	37,70	16,84	5,72	0,19
0301TNL.XX.XX.V_A015NW_A015NW_A008NW_010	12,70	1,65	20,00	11,90	44,65	6,35	0,89	20,00	6,06	4,27	36,20	37,70	19,60	6,55	0,23
0301TNL.XX.XX.V_A015NW_A015NW_A010NW_010	12,70	1,65	20,00	11,90	44,65	9,53	0,89	20,00	4,47	5,86	36,20	37,70	19,60	6,55	0,23
0301TNL.XX.XX.V_A015NW_A015NW_A015NW_010	12,70	1,65	20,00	11,90	44,65	12,70	1,65	20,00	3,65	7,80	36,20	37,70	19,60	6,55	0,23
0301TNL.XX.XX.V_A020NW_A020NW_A008NW_010	19,05	1,65	25,00	15,07	47,82	6,35	0,89	20,00	6,06	4,27	36,20	37,70	25,95	9,72	0,3
0301TNL.XX.XX.V_A020NW_A020NW_A010NW_010	19,05	1,65	25,00	15,07	47,82	9,53	0,89	20,00	4,47	5,86	36,20	37,70	25,95	9,72	0,3
0301TNL.XX.XX.V_A020NW_A020NW_A015NW_010	19,05	1,65	25,00	15,07	47,82	12,70	1,65	20,00	3,65	7,80	36,20	37,70	25,95	9,72	0,3
0301TNL.XX.XX.V_A020NW_A020NW_A020NW_010	19,05	1,65	25,00	15,07	52,82	19,05	1,65	25,00	0,47	10,97	36,20	37,70	25,95	9,72	0,3
0301TNL.XX.XX.V_A025NW_A025NW_A008NW_010	25,40	1,65	25,00	18,25	51,00	6,35	0,89	20,00	6,06	4,27	36,20	37,70	32,30	12,90	0,4
0301TNL.XX.XX.V_A025NW_A025NW_A010NW_010	25,40	1,65	25,00	18,25	51,00	9,53	0,89	20,00	4,47	5,86	36,20	37,70	32,30	12,90	0,39
0301TNL.XX.XX.V_A025NW_A025NW_A015NW_010	25,40	1,65	25,00	18,25	51,00	12,70	1,65	20,00	3,65	7,80	36,20	37,70	32,30	12,90	0,4
0301TNL.XX.XX.V_A025NW_A025NW_A020NW_010	25,40	1,65	25,00	18,25	56,00	19,05	1,65	25,00	0,47	10,97	36,20	37,70	32,30	12,90	0,4
0301TNL.XX.XX.V_A040NW_A040NW_A008NW_010	38,10	1,65	30,00	24,60	57,35	6,35	0,89	20,00	6,06	4,27	36,20	37,70	45,00	19,25	0,62
0301TNL.XX.XX.V_A040NW_A040NW_A010NW_010	38,10	1,65	30,00	24,60	57,35	9,53	0,89	20,00	4,47	5,86	36,20	37,70	45,00	19,25	0,62
0301TNL.XX.XX.V_A040NW_A040NW_A015NW_010	38,10	1,65	30,00	24,60	57,35	12,70	1,65	20,00	3,65	7,80	36,20	37,70	45,00	19,25	0,63
0301TNL.XX.XX.V_A040NW_A040NW_A020NW_010	38,10	1,65	30,00	24,60	62,35	19,05	1,65	25,00	0,47	10,97	36,20	37,70	45,00	19,25	0,62
0301TNL.XX.XX.V_A015NW_A015NW_A015NW_015	12,70	1,65	20,00	13,00	54,20	12,70	1,65	20,00	9,67	7,80	53,20	57,20	20,70	7,60	0,52
0301TNL.XX.XX.V_A020NW_A020NW_A015NW_015	19,05	1,65	25,00	16,17	57,37	12,70	1,65	20,00	9,67	7,80	53,20	57,20	27,05	10,77	0,63
0301TNL.XX.XX.V_A020NW_A020NW_A020NW_015	19,05	1,65	25,00	16,17	62,37	19,05	1,65	25,00	6,49	10,97	53,20	57,20	27,05	10,77	0,63
0301TNL.XX.XX.V_A025NW_A025NW_A015NW_015	25,40	1,65	25,00	19,35	60,55	12,70	1,65	20,00	9,67	7,80	53,20	57,20	33,40	13,95	0,74
0301TNL.XX.XX.V_A025NW_A025NW_A020NW_015	25,40	1,65	25,00	19,35	65,55	19,05	1,65	25,00	6,49	10,97	53,20	57,20	33,40	13,95	0,74
0301TNL.XX.XX.V_A025NW_A025NW_A025NW_015	25,40	1,65	25,00	19,35	65,55	25,40	1,65	25,00	3,32	14,15	53,20	57,20	33,40	13,95	0,73
0301TNL.XX.XX.V_A040NW_A040NW_A015NW_015	38,10	1,65	30,00	25,70	66,90	12,70	1,65	20,00	9,67	7,80	53,20	57,20	46,10	20,30	1,12
0301TNL.XX.XX.V_A040NW_A040NW_A020NW_015	38,10	1,65	30,00	25,70	71,90	19,05	1,65	25,00	6,49	10,97	53,20	57,20	46,10	20,30	1,12
0301TNL.XX.XX.V_A040NW_A040NW_A025NW_015	38,10	1,65	30,00	25,70	71,90	25,40	1,65	25,00	3,32	14,15	53,20	57,20	46,10	20,30	1,11
0301TNL.XX.XX.V_A050NW_A050NW_A015NW_015	50,80	1,65	30,00	32,05	73,25	12,70	1,65	20,00	9,67	7,80	53,20	57,20	58,80	26,65	1,53
0301TNL.XX.XX.V_A050NW_A050NW_A020NW_015	50,80	1,65	30,00	32,05	78,25	19,05	1,65	25,00	6,49	10,97	53,20	57,20	58,80	26,65	1,52
0301TNL.XX.XX.V_A050NW_A050NW_A025NW_015	50,80	1,65	30,00	32,05	78,25	25,40	1,65	25,00	3,32	14,15	53,20	57,20	58,80	26,65	1,52
0301TNL.XX.XX.V_A065NW_A065NW_A015NW_015	63,50	1,65	30,00	38,40	79,60	12,70	1,65	20,00	9,67	7,80	53,20	57,20	71,50	33,00	1,96
0301TNL.XX.XX.V_A065NW_A065NW_A020NW_015	63,50	1,65	30,00	38,40	84,60	19,05	1,65	25,00	6,49	10,97	53,20	57,20	71,50	33,00	1,96
0301TNL.XX.XX.V_A065NW_A065NW_A025NW_015	63,50	1,65	30,00	38,40	84,60	25,40	1,65	25,00	3,32	14,15	53,20	57,20	71,50	33,00	1,96
0301TNL.XX.XX.V_A025NW_A025NW_A025NW_020	25,40	1,65	25,00	20,55	71,99	25,40	1,65	25,00	7,62	14,15	64,40	71,50	34,60	14,79	1,13
0301TNL.XX.XX.V_A040NW_A040NW_A025NW_020	38,10	1,65	30,00	26,90	78,34	25,40	1,65	25,00	7,62	14,15	64,40	71,50	47,30	21,14	1,58

Note: Body components begin with the code D.B.

SERIES 4000 ■ VALVE BODY DIMENSIONS

T valve

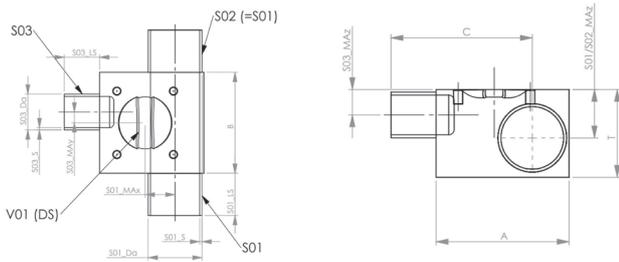


	S01/ S02					S03					A	B	T	Max	Weight [kg]	
	Da	S	LS	Max	C	Da	S	LS	Max	C						
ASME-BPE/DIN-11866 R-C																
0301TNL.XX.XX.V_A050NW_A050NW_A025NW_020	50,80	1,65	30,00	27,49	84,69	25,40	1,65	25,00	7,62	28,20	64,40	71,50	60,00	27,49	2,13	
0301TNL.XX.XX.V_A065NW_A065NW_A025NW_020	63,50	1,65	30,00	33,84	91,04	25,40	1,65	25,00	7,62	28,20	64,40	71,50	72,70	33,84	2,73	
0301TNL.XX.XX.V_A080NW_A080NW_A025NW_020	76,20	1,65	30,00	40,19	97,39	25,40	1,65	25,00	7,62	28,20	64,40	71,50	85,40	40,19	3,36	
0301TNL.XX.XX.V_A100NW_A100NW_A025NW_020	101,60	2,11	30,00	52,43	109,63	25,40	1,65	25,00	7,62	28,20	64,40	71,50	110,69	52,43	4,89	
0301TNL.XX.XX.V_A025NW_A025NW_A025NW_025	25,40	1,65	25,00	15,59	77,69	25,40	1,65	25,00	11,64	28,20	74,20	82,70	37,60	15,59	1,65	
0301TNL.XX.XX.V_A040NW_A040NW_A025NW_025	38,10	1,65	30,00	21,94	84,04	25,40	1,65	25,00	11,64	28,20	74,20	82,70	50,30	21,94	2,13	
0301TNL.XX.XX.V_A050NW_A050NW_A025NW_025	50,80	1,65	30,00	28,29	90,39	25,40	1,65	25,00	11,64	28,20	74,20	82,70	63,00	28,29	2,84	
0301TNL.XX.XX.V_A065NW_A065NW_A025NW_025	63,50	1,65	30,00	34,64	96,74	25,40	1,65	25,00	11,64	28,20	74,20	82,70	75,70	34,64	3,59	
0301TNL.XX.XX.V_A080NW_A080NW_A025NW_025	76,20	1,65	30,00	40,99	103,09	25,40	1,65	25,00	11,64	28,20	74,20	82,70	88,40	40,99	4,39	
0301TNL.XX.XX.V_A100NW_A100NW_A025NW_025	101,60	2,11	30,00	53,23	115,33	25,40	1,65	25,00	11,64	28,20	74,20	82,70	113,69	53,23	6,28	
0301TNL.XX.XX.V_A040NW_A040NW_A040NW_025	38,10	1,65	30,00	21,94	89,04	38,10	1,65	30,00	5,29	40,90	74,20	82,70	50,30	21,94	2,11	
0301TNL.XX.XX.V_A050NW_A050NW_A040NW_025	50,80	1,65	30,00	28,29	95,39	38,10	1,65	30,00	5,29	40,90	74,20	82,70	63,00	28,29	2,81	
0301TNL.XX.XX.V_A065NW_A065NW_A040NW_025	63,50	1,65	30,00	34,64	101,74	38,10	1,65	30,00	5,29	40,90	74,20	82,70	75,70	34,64	3,56	
0301TNL.XX.XX.V_A080NW_A080NW_A040NW_025	76,20	1,65	30,00	40,99	108,09	38,10	1,65	30,00	5,29	40,90	74,20	82,70	88,40	40,99	4,37	
0301TNL.XX.XX.V_A100NW_A100NW_A040NW_025	101,60	2,11	30,00	53,23	120,33	38,10	1,65	30,00	5,29	40,90	74,20	82,70	113,69	53,23	6,25	
0301TNL.XX.XX.V_A040NW_A040NW_A040NW_032	38,10	1,65	30,00	22,94	96,69	38,10	1,65	30,00	10,94	40,90	87,50	96,40	50,30	22,94	2,73	
0301TNL.XX.XX.V_A050NW_A050NW_A040NW_032	50,80	1,65	30,00	29,29	103,04	38,10	1,65	30,00	10,94	40,90	87,50	96,40	63,00	29,29	3,6	
0301TNL.XX.XX.V_A065NW_A065NW_A040NW_032	63,50	1,65	30,00	35,64	109,39	38,10	1,65	30,00	10,94	40,90	87,50	96,40	75,70	35,64	4,55	
0301TNL.XX.XX.V_A080NW_A080NW_A040NW_032	76,20	1,65	30,00	41,99	115,74	38,10	1,65	30,00	10,94	40,90	87,50	96,40	88,40	41,99	5,55	
0301TNL.XX.XX.V_A100NW_A100NW_A040NW_032	101,60	2,11	30,00	54,23	127,98	38,10	1,65	30,00	10,94	40,90	87,50	96,40	113,69	54,23	7,87	
0301TNL.XX.XX.V_A040NW_A040NW_A040NW_040	38,10	1,65	30,00	23,39	102,89	38,10	1,65	30,00	13,00	40,90	99,00	111,90	53,30	23,39	3,93	
0301TNL.XX.XX.V_A050NW_A050NW_A040NW_040	50,80	1,65	30,00	29,74	109,24	38,10	1,65	30,00	13,00	40,90	99,00	111,90	66,00	29,74	4,79	
0301TNL.XX.XX.V_A065NW_A065NW_A040NW_040	63,50	1,65	30,00	36,09	115,59	38,10	1,65	30,00	13,00	40,90	99,00	111,90	78,70	36,09	5,98	
0301TNL.XX.XX.V_A080NW_A080NW_A040NW_040	76,20	1,65	30,00	42,44	121,94	38,10	1,65	30,00	13,00	40,90	99,00	111,90	91,40	42,44	7,24	
0301TNL.XX.XX.V_A100NW_A100NW_A040NW_040	101,60	2,11	30,00	54,68	134,18	38,10	1,65	30,00	13,00	40,90	99,00	111,90	116,69	54,68	10,12	
0301TNL.XX.XX.V_A050NW_A050NW_A050NW_040	50,80	1,65	30,00	29,74	109,24	50,80	1,65	30,00	6,65	53,60	99,00	111,90	66,00	29,74	4,74	
0301TNL.XX.XX.V_A065NW_A065NW_A050NW_040	63,50	1,65	30,00	36,09	115,59	50,80	1,65	30,00	6,65	53,60	99,00	111,90	78,70	36,09	5,93	
0301TNL.XX.XX.V_A080NW_A080NW_A050NW_040	76,20	1,65	30,00	42,44	121,94	50,80	1,65	30,00	6,65	53,60	99,00	111,90	91,40	42,44	7,19	
0301TNL.XX.XX.V_A100NW_A100NW_A050NW_040	101,60	2,11	30,00	54,68	134,18	50,80	1,65	30,00	6,65	53,60	99,00	111,90	116,69	54,68	10,07	
0301TNL.XX.XX.V_A050NW_A050NW_A050NW_050	50,80	1,65	30,00	30,98	119,48	50,80	1,65	30,00	12,96	53,60	117,00	133,90	68,00	30,98	6,52	
0301TNL.XX.XX.V_A065NW_A065NW_A050NW_050	63,50	1,65	30,00	37,33	125,83	50,80	1,65	30,00	12,96	53,60	117,00	133,90	80,70	37,33	8,05	
0301TNL.XX.XX.V_A080NW_A080NW_A050NW_050	76,20	1,65	30,00	43,68	132,18	50,80	1,65	30,00	12,96	53,60	117,00	133,90	93,40	43,68	9,72	
0301TNL.XX.XX.V_A100NW_A100NW_A050NW_050	101,60	2,11	30,00	55,92	144,42	50,80	1,65	30,00	12,96	53,60	117,00	133,90	118,69	55,92	13,47	
0301TNL.XX.XX.V_A065NW_A065NW_A065NW_050	63,50	1,65	30,00	37,33	125,83	63,50	1,65	30,00	6,61	66,30	117,00	133,90	80,70	37,33	7,98	
0301TNL.XX.XX.V_A080NW_A080NW_A065NW_050	76,20	1,65	30,00	43,68	132,18	63,50	1,65	30,00	6,61	66,30	117,00	133,90	93,40	43,68	9,65	
0301TNL.XX.XX.V_A100NW_A100NW_A065NW_050	101,60	2,11	30,00	55,92	144,42	63,50	1,65	30,00	6,61	66,30	117,00	133,90	118,69	55,92	13,4	

Note: Body components begin with the code D.B.



T valve

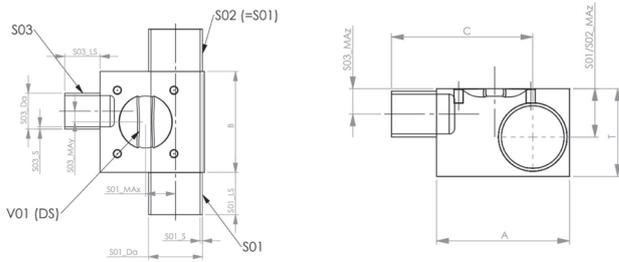


	S01/ S02					S03					A	B	T	Max	Weight [kg]
	Da	S	LS	Max	C	Da	S	LS	Max	C					

DIN-11866 R-A (11850 R-2)

0301TNL.XX.XX.V_D008NW_D008NW_D008NW_010	10,00	1,00	20,00	5,85	10,00	1,00	8,00	4,35	6,10	8,45	36,20	37,70	17,20	5,85	0,2
0301TNL.XX.XX.V_D010NW_D010NW_D008NW_010	13,00	1,50	20,00	6,85	10,00	1,00	8,00	4,35	6,10	8,45	36,20	37,70	20,05	6,85	0,23
0301TNL.XX.XX.V_D010NW_D010NW_D010NW_010	13,00	1,50	20,00	6,85	13,00	1,50	10,00	3,35	7,95	11,63	36,20	37,70	20,05	6,85	0,23
0301TNL.XX.XX.V_D015NW_D015NW_D008NW_010	19,00	1,50	25,00	9,85	10,00	1,00	8,00	4,35	6,10	8,45	36,20	37,70	26,05	9,85	0,3
0301TNL.XX.XX.V_D015NW_D015NW_D010NW_010	19,00	1,50	25,00	9,85	13,00	1,50	10,00	3,35	7,95	11,63	36,20	37,70	26,05	9,85	0,3
0301TNL.XX.XX.V_D015NW_D015NW_D015NW_010	19,00	1,50	25,00	9,85	19,00	1,50	16,00	0,35	10,95	15,50	36,20	37,70	26,05	9,85	0,3
0301TNL.XX.XX.V_D020NW_D020NW_D008NW_010	23,00	1,50	25,00	11,85	10,00	1,00	8,00	4,35	6,10	27,70	36,20	37,70	30,05	11,85	0,35
0301TNL.XX.XX.V_D020NW_D020NW_D010NW_010	23,00	1,50	25,00	11,85	13,00	1,50	10,00	3,35	7,95	8,45	36,20	37,70	30,05	11,85	0,36
0301TNL.XX.XX.V_D020NW_D020NW_D015NW_010	23,00	1,50	25,00	11,85	19,00	1,50	16,00	0,35	10,95	11,63	36,20	37,70	30,05	11,85	0,35
0301TNL.XX.XX.V_D020NW_D020NW_D020NW_010	23,00	1,50	25,00	11,85	23,00	1,50	20,00	1,65	12,95	15,50	36,20	37,70	30,05	11,85	0,35
0301TNL.XX.XX.V_D025NW_D025NW_D008NW_010	29,00	1,50	25,00	14,85	10,00	1,00	8,00	4,35	6,10	21,85	36,20	37,70	36,05	14,85	0,45
0301TNL.XX.XX.V_D025NW_D025NW_D010NW_010	29,00	1,50	25,00	14,85	13,00	1,50	10,00	3,35	7,95	8,45	36,20	37,70	36,05	14,85	0,45
0301TNL.XX.XX.V_D025NW_D025NW_D015NW_010	29,00	1,50	25,00	14,85	19,00	1,50	16,00	0,35	10,95	11,63	36,20	37,70	36,05	14,85	0,45
0301TNL.XX.XX.V_D025NW_D025NW_D020NW_010	29,00	1,50	25,00	14,85	23,00	1,50	20,00	1,65	12,95	15,50	36,20	37,70	36,05	14,85	0,44
0301TNL.XX.XX.V_D032NW_D032NW_D008NW_010	35,00	1,50	30,00	17,85	10,00	1,00	8,00	4,35	6,10	21,85	36,20	37,70	42,05	17,85	0,56
0301TNL.XX.XX.V_D032NW_D032NW_D010NW_010	35,00	1,50	30,00	17,85	13,00	1,50	10,00	3,35	7,95	8,45	36,20	37,70	42,05	17,85	0,56
0301TNL.XX.XX.V_D032NW_D032NW_D015NW_010	35,00	1,50	30,00	17,85	19,00	1,50	16,00	0,35	10,95	11,63	36,20	37,70	42,05	17,85	0,56
0301TNL.XX.XX.V_D040NW_D040NW_D008NW_010	41,00	1,50	30,00	20,85	10,00	1,00	8,00	4,35	6,10	15,50	36,20	37,70	48,05	20,85	0,67
0301TNL.XX.XX.V_D040NW_D040NW_D010NW_010	41,00	1,50	30,00	20,85	13,00	1,50	10,00	3,35	7,95	21,85	36,20	37,70	48,05	20,85	0,67
0301TNL.XX.XX.V_D040NW_D040NW_D015NW_010	41,00	1,50	30,00	20,85	19,00	1,50	16,00	0,35	10,95	15,50	36,20	37,70	48,05	20,85	0,67
0301TNL.XX.XX.V_D015NW_D015NW_D015NW_015	19,00	1,50	25,00	10,90	19,00	1,50	16,00	6,37	10,95	15,50	53,20	57,20	27,15	10,90	0,63
0301TNL.XX.XX.V_D020NW_D020NW_D015NW_015	23,00	1,50	25,00	12,90	19,00	1,50	16,00	6,37	10,95	21,85	53,20	57,20	31,15	12,90	0,68
0301TNL.XX.XX.V_D020NW_D020NW_D020NW_015	23,00	1,50	25,00	12,90	23,00	1,50	20,00	4,37	12,95	15,50	53,20	57,20	31,15	12,90	0,68
0301TNL.XX.XX.V_D025NW_D025NW_D015NW_015	29,00	1,50	25,00	15,90	19,00	1,50	16,00	6,37	10,95	21,85	53,20	57,20	37,15	15,90	0,83
0301TNL.XX.XX.V_D025NW_D025NW_D020NW_015	29,00	1,50	25,00	15,90	23,00	1,50	20,00	4,37	12,95	28,20	53,20	57,20	37,15	15,90	0,83
0301TNL.XX.XX.V_D025NW_D025NW_D025NW_015	29,00	1,50	25,00	15,90	29,00	1,50	26,00	1,37	15,95	15,50	53,20	57,20	37,15	15,90	0,82
0301TNL.XX.XX.V_D032NW_D032NW_D015NW_015	35,00	1,50	30,00	18,90	19,00	1,50	16,00	6,37	10,95	21,85	53,20	57,20	43,15	18,90	1,02
0301TNL.XX.XX.V_D032NW_D032NW_D020NW_015	35,00	1,50	30,00	18,90	23,00	1,50	20,00	4,37	12,95	28,20	53,20	57,20	43,15	18,90	1,01
0301TNL.XX.XX.V_D032NW_D032NW_D025NW_015	35,00	1,50	30,00	18,90	29,00	1,50	26,00	1,37	15,95	15,50	53,20	57,20	43,15	18,90	1
0301TNL.XX.XX.V_D040NW_D040NW_D015NW_015	41,00	1,50	30,00	21,90	19,00	1,50	16,00	6,37	10,95	21,85	53,20	57,20	49,15	21,90	1,2
0301TNL.XX.XX.V_D040NW_D040NW_D020NW_015	41,00	1,50	30,00	21,90	23,00	1,50	20,00	4,37	12,95	28,20	53,20	57,20	49,15	21,90	1,19
0301TNL.XX.XX.V_D040NW_D040NW_D025NW_015	41,00	1,50	30,00	21,90	29,00	1,50	26,00	1,37	15,95	15,50	53,20	57,20	49,15	21,90	1,18
0301TNL.XX.XX.V_D050NW_D050NW_D015NW_015	53,00	1,50	30,00	27,90	19,00	1,50	16,00	6,37	10,95	21,85	53,20	57,20	61,15	27,90	1,58
0301TNL.XX.XX.V_D050NW_D050NW_D020NW_015	53,00	1,50	30,00	27,90	23,00	1,50	20,00	4,37	12,95	28,20	53,20	57,20	61,15	27,90	1,58
0301TNL.XX.XX.V_D050NW_D050NW_D025NW_015	53,00	1,50	30,00	27,90	29,00	1,50	26,00	1,37	15,95	28,20	53,20	57,20	61,15	27,90	1,57
0301TNL.XX.XX.V_D065NW_D065NW_D015NW_015	70,00	2,00	30,00	35,90	19,00	1,50	16,00	6,37	10,95	28,20	53,20	57,20	78,00	35,90	2,27

Note: Body components begin with the code D.B.

T valve

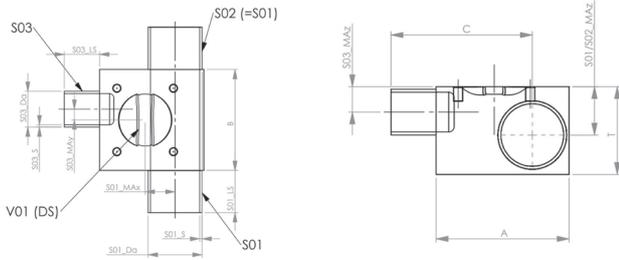


	S01/ S02					S03					A	B	T	Max	Weight [kg]	
	Da	S	LS	Max	C	Da	S	LS	Max	C						
DIN-11866 R-A (11850 R-2)																
0301TNL.XX.XX.V_D065NW_D065NW_D020NW_015	70,00	2,00	30,00	35,90	87,50	53,20	1,50	25,00	1,37	31,80	53,20	57,20	78,00	35,90	2,26	
0301TNL.XX.XX.V_D065NW_D065NW_D025NW_015	70,00	2,00	30,00	35,90	87,50	53,20	1,50	25,00	5,67	31,80	53,20	57,20	78,00	35,90	2,25	
0301TNL.XX.XX.V_D025NW_D025NW_D025NW_020	29,00	1,50	25,00	16,74	73,94	64,40	1,50	25,00	5,67	31,80	64,40	71,50	38,35	16,74	1,18	
0301TNL.XX.XX.V_D032NW_D032NW_D025NW_020	35,00	1,50	30,00	19,74	76,94	64,40	1,50	25,00	5,67	31,80	64,40	71,50	44,35	19,74	1,43	
0301TNL.XX.XX.V_D040NW_D040NW_D025NW_020	41,00	1,50	30,00	22,74	79,94	64,40	1,50	25,00	5,67	31,80	64,40	71,50	50,35	22,74	1,68	
0301TNL.XX.XX.V_D050NW_D050NW_D025NW_020	53,00	1,50	30,00	28,74	85,94	64,40	1,50	25,00	5,67	31,80	64,40	71,50	62,35	28,74	2,21	
0301TNL.XX.XX.V_D065NW_D065NW_D025NW_020	70,00	2,00	30,00	36,74	93,94	64,40	1,50	25,00	5,67	31,80	64,40	71,50	79,20	36,74	3,11	
0301TNL.XX.XX.V_D080NW_D080NW_D025NW_020	85,00	2,00	30,00	44,24	101,44	64,40	1,50	25,00	5,67	31,80	64,40	71,50	94,20	44,24	3,91	
0301TNL.XX.XX.V_D100NW_D100NW_D025NW_020	104,00	2,00	30,00	53,74	110,94	64,40	1,50	25,00	9,69	31,80	64,40	71,50	113,20	53,74	5	
0301TNL.XX.XX.V_D025NW_D025NW_D025NW_025	29,00	1,50	25,00	17,54	79,64	74,20	1,50	25,00	9,69	31,80	74,20	82,70	41,35	17,54	1,74	
0301TNL.XX.XX.V_D032NW_D032NW_D025NW_025	35,00	1,50	30,00	20,54	82,64	74,20	1,50	25,00	9,69	31,80	74,20	82,70	47,35	20,54	1,95	
0301TNL.XX.XX.V_D040NW_D040NW_D025NW_025	41,00	1,50	30,00	23,54	85,64	74,20	1,50	25,00	9,69	31,80	74,20	82,70	53,35	23,54	2,27	
0301TNL.XX.XX.V_D050NW_D050NW_D025NW_025	53,00	1,50	30,00	29,54	91,64	74,20	1,50	25,00	9,69	31,80	74,20	82,70	65,35	29,54	2,94	
0301TNL.XX.XX.V_D065NW_D065NW_D025NW_025	70,00	2,00	30,00	37,54	99,64	74,20	1,50	25,00	9,69	31,80	74,20	82,70	82,20	37,54	4,07	
0301TNL.XX.XX.V_D080NW_D080NW_D025NW_025	85,00	2,00	30,00	45,04	107,14	74,20	1,50	25,00	9,69	31,80	74,20	82,70	97,20	45,04	5,06	
0301TNL.XX.XX.V_D100NW_D100NW_D025NW_025	104,00	2,00	30,00	54,54	116,64	74,20	1,50	30,00	6,69	37,80	74,20	82,70	116,20	54,54	6,43	
0301TNL.XX.XX.V_D032NW_D032NW_D032NW_025	35,00	1,50	30,00	20,54	87,64	74,20	1,50	30,00	6,69	37,80	74,20	82,70	47,35	20,54	1,94	
0301TNL.XX.XX.V_D050NW_D050NW_D032NW_025	53,00	1,50	30,00	29,54	96,64	74,20	1,50	30,00	6,69	37,80	74,20	82,70	65,35	29,54	2,93	
0301TNL.XX.XX.V_D065NW_D065NW_D032NW_025	70,00	2,00	30,00	37,54	104,64	74,20	1,50	30,00	6,69	37,80	74,20	82,70	82,20	37,54	4,06	
0301TNL.XX.XX.V_D080NW_D080NW_D032NW_025	85,00	2,00	30,00	45,04	112,14	74,20	1,50	30,00	6,69	37,80	74,20	82,70	97,20	45,04	5,06	
0301TNL.XX.XX.V_D100NW_D100NW_D032NW_025	104,00	2,00	30,00	54,54	121,64	74,20	1,50	30,00	12,34	37,80	74,20	82,70	116,20	54,54	6,42	
0301TNL.XX.XX.V_D032NW_D032NW_D032NW_032	35,00	1,50	30,00	21,54	95,29	87,50	1,50	30,00	9,34	43,80	87,50	96,40	47,35	21,54	2,63	
0301TNL.XX.XX.V_D040NW_D040NW_D040NW_032	41,00	1,50	30,00	24,54	98,29	87,50	1,50	30,00	12,34	37,80	87,50	96,40	53,35	24,54	2,89	
0301TNL.XX.XX.V_D050NW_D050NW_D032NW_032	53,00	1,50	30,00	30,54	104,29	87,50	1,50	30,00	12,34	37,80	87,50	96,40	65,35	30,54	3,76	
0301TNL.XX.XX.V_D065NW_D065NW_D032NW_032	70,00	2,00	30,00	38,54	112,29	87,50	1,50	30,00	12,34	37,80	87,50	96,40	82,20	38,54	5,15	
0301TNL.XX.XX.V_D080NW_D080NW_D032NW_032	85,00	2,00	30,00	46,04	119,79	87,50	1,50	30,00	12,34	37,80	87,50	96,40	97,20	46,04	6,39	
0301TNL.XX.XX.V_D100NW_D100NW_D032NW_032	104,00	2,00	30,00	55,54	129,29	87,50	1,50	30,00	11,40	43,80	87,50	96,40	116,20	55,54	8,08	
0301TNL.XX.XX.V_D040NW_D040NW_D040NW_040	41,00	1,50	30,00	24,99	104,49	99,00	1,50	30,00	11,40	43,80	99,00	111,90	56,35	24,99	4,03	
0301TNL.XX.XX.V_D050NW_D050NW_D040NW_040	53,00	1,50	30,00	30,99	110,49	99,00	1,50	30,00	11,40	43,80	99,00	111,90	68,35	30,99	4,97	
0301TNL.XX.XX.V_D065NW_D065NW_D040NW_040	70,00	2,00	30,00	38,99	118,49	99,00	1,50	30,00	11,40	43,80	99,00	111,90	85,20	38,99	6,71	
0301TNL.XX.XX.V_D080NW_D080NW_D040NW_040	85,00	2,00	30,00	46,49	125,99	99,00	1,50	30,00	11,40	43,80	99,00	111,90	100,20	46,49	8,26	
0301TNL.XX.XX.V_D100NW_D100NW_D040NW_040	104,00	2,00	30,00	55,99	135,49	99,00	1,50	30,00	5,40	55,80	99,00	111,90	119,20	55,99	10,36	
0301TNL.XX.XX.V_D050NW_D050NW_D050NW_040	53,00	1,50	30,00	30,99	110,49	99,00	1,50	30,00	5,40	55,80	99,00	111,90	68,35	30,99	4,91	
0301TNL.XX.XX.V_D065NW_D065NW_D050NW_040	70,00	2,00	30,00	38,99	118,49	99,00	1,50	30,00	5,40	55,80	99,00	111,90	85,20	38,99	6,65	
0301TNL.XX.XX.V_D080NW_D080NW_D050NW_040	85,00	2,00	30,00	46,49	125,99	99,00	1,50	30,00	5,40	55,80	99,00	111,90	100,20	46,49	8,21	
0301TNL.XX.XX.V_D100NW_D100NW_D050NW_040	104,00	2,00	30,00	55,99	135,49	99,00	1,65	30,00	6,61	66,30	99,00	111,90	119,20	55,99	10,31	

Note: Body components begin with the code D.B.

SERIES 40000 ■ VALVE BODY DIMENSIONS

T valve

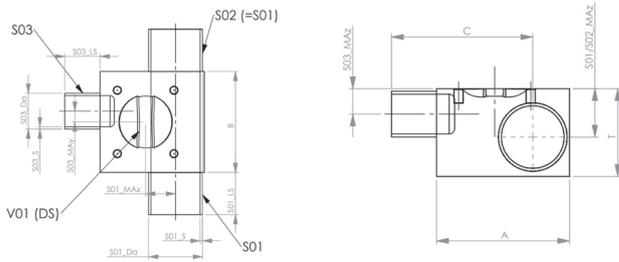

	S01/ S02					S03					A	B	T	Max	Weight [kg]
	Da	S	LS	Max	C	Da	S	LS	Max	C					

DIN-11866 R-A (11850 R-2)

0301TNL.XX.XX.V_D050NW_D050NW_D050NW_050	53,00	1,50	30,00	32,23	120,73	53,00	1,50	30,00	11,71	55,80	117,00	133,90	70,35	32,23	6,71
0301TNL.XX.XX.V_D065NW_D065NW_D050NW_050	70,00	2,00	30,00	40,23	128,73	53,00	1,50	30,00	11,71	55,80	117,00	133,90	87,20	40,23	8,99
0301TNL.XX.XX.V_D080NW_D080NW_D050NW_050	85,00	2,00	30,00	47,73	136,23	53,00	1,50	30,00	11,71	55,80	117,00	133,90	102,20	47,73	11,04
0301TNL.XX.XX.V_D100NW_D100NW_D050NW_050	104,00	2,00	30,00	57,23	145,73	53,00	1,50	30,00	11,71	55,80	117,00	133,90	121,20	57,23	13,79
0301TNL.XX.XX.V_D065NW_D065NW_D065NW_050	70,00	2,00	30,00	40,23	128,73	70,00	2,00	30,00	3,71	73,50	117,00	133,90	87,20	40,23	8,92
0301TNL.XX.XX.V_D080NW_D080NW_D065NW_050	85,00	2,00	30,00	47,73	136,23	70,00	2,00	30,00	3,71	73,50	117,00	133,90	102,20	47,73	10,97
0301TNL.XX.XX.V_D100NW_D100NW_D065NW_050	104,00	2,00	30,00	57,23	145,73	70,00	2,00	30,00	3,71	73,50	117,00	133,90	121,20	57,23	13,71


ISO-1127 / DIN 11866 R-B

0301TNL.XX.XX.V_I008NW_I008NW_I008NW_010	13,50	1,60	20,00	7,00	45,10	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	7,00	0,23
0301TNL.XX.XX.V_I010NW_I010NW_I008NW_010	17,20	1,60	25,00	8,85	46,95	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	8,85	0,27
0301TNL.XX.XX.V_I010NW_I010NW_I010NW_010	17,20	1,60	25,00	8,85	51,95	17,20	1,60	25,00	1,35	20,00	17,20	1,60	20,00	8,85	0,27
0301TNL.XX.XX.V_I015NW_I015NW_I008NW_010	21,30	1,60	25,00	10,90	49,00	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	10,90	0,33
0301TNL.XX.XX.V_I015NW_I015NW_I010NW_010	21,30	1,60	25,00	10,90	54,00	17,20	1,60	25,00	1,35	20,00	17,20	1,60	20,00	10,90	0,33
0301TNL.XX.XX.V_I015NW_I015NW_I015NW_010	21,30	1,60	25,00	10,90	54,00	21,30	1,60	25,00	0,70	24,10	21,30	1,60	24,10	10,90	0,33
0301TNL.XX.XX.V_I020NW_I020NW_I008NW_010	26,90	1,60	25,00	13,70	51,80	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	13,70	0,42
0301TNL.XX.XX.V_I020NW_I020NW_I010NW_010	26,90	1,60	25,00	13,70	56,80	17,20	1,60	25,00	1,35	20,00	17,20	1,60	20,00	13,70	0,42
0301TNL.XX.XX.V_I020NW_I020NW_I015NW_010	26,90	1,60	25,00	13,70	56,80	21,30	1,60	25,00	0,70	24,10	21,30	1,60	24,10	13,70	0,42
0301TNL.XX.XX.V_I025NW_I025NW_I008NW_010	33,70	2,00	25,00	16,70	54,80	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	16,70	0,56
0301TNL.XX.XX.V_I025NW_I025NW_I010NW_010	33,70	2,00	25,00	16,70	59,80	17,20	1,60	25,00	1,35	20,00	17,20	1,60	20,00	16,70	0,56
0301TNL.XX.XX.V_I025NW_I025NW_I015NW_010	33,70	2,00	25,00	16,70	59,80	21,30	1,60	25,00	0,70	24,10	21,30	1,60	24,10	16,70	0,55
0301TNL.XX.XX.V_I032NW_I032NW_I008NW_010	42,40	2,00	30,00	21,05	59,15	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	21,05	0,74
0301TNL.XX.XX.V_I032NW_I032NW_I010NW_010	42,40	2,00	30,00	21,05	64,15	17,20	1,60	25,00	1,35	20,00	17,20	1,60	20,00	21,05	0,74
0301TNL.XX.XX.V_I032NW_I032NW_I015NW_010	42,40	2,00	30,00	21,05	64,15	21,30	1,60	25,00	0,70	24,10	21,30	1,60	24,10	21,05	0,73
0301TNL.XX.XX.V_I040NW_I040NW_I008NW_010	48,30	2,00	30,00	24,00	62,10	13,50	1,60	20,00	3,20	16,30	13,50	1,60	16,30	24,00	0,85
0301TNL.XX.XX.V_I040NW_I040NW_I010NW_010	48,30	2,00	30,00	24,00	67,10	17,20	1,60	25,00	1,35	20,00	17,20	1,60	20,00	24,00	0,85
0301TNL.XX.XX.V_I040NW_I040NW_I015NW_010	48,30	2,00	30,00	24,00	67,10	21,30	1,60	25,00	0,70	24,10	21,30	1,60	24,10	24,00	0,85
0301TNL.XX.XX.V_I015NW_I015NW_I015NW_015	21,30	1,60	25,00	11,95	63,55	21,30	1,60	25,00	5,32	24,10	21,30	1,60	24,10	11,95	0,66
0301TNL.XX.XX.V_I020NW_I020NW_I015NW_015	26,90	1,60	25,00	14,75	66,35	21,30	1,60	25,00	5,32	24,10	21,30	1,60	24,10	14,75	0,78
0301TNL.XX.XX.V_I020NW_I020NW_I020NW_015	26,90	1,60	25,00	14,75	66,35	26,90	1,60	25,00	2,52	29,70	26,90	1,60	29,70	14,75	0,77
0301TNL.XX.XX.V_I025NW_I025NW_I015NW_015	33,70	2,00	25,00	17,75	69,35	21,30	1,60	25,00	5,32	24,10	21,30	1,60	24,10	17,75	1
0301TNL.XX.XX.V_I025NW_I025NW_I020NW_015	33,70	2,00	25,00	17,75	69,35	26,90	1,60	25,00	2,52	29,70	26,90	1,60	29,70	17,75	0,99
0301TNL.XX.XX.V_I032NW_I032NW_I015NW_015	42,40	2,00	30,00	22,10	73,70	21,30	1,60	25,00	5,32	24,10	21,30	1,60	24,10	22,10	1,29
0301TNL.XX.XX.V_I032NW_I032NW_I020NW_015	42,40	2,00	30,00	22,10	73,70	26,90	1,60	25,00	2,52	29,70	26,90	1,60	29,70	22,10	1,28
0301TNL.XX.XX.V_I040NW_I040NW_I015NW_015	48,30	2,00	30,00	25,05	76,65	21,30	1,60	25,00	5,32	24,10	21,30	1,60	24,10	25,05	1,48
0301TNL.XX.XX.V_I040NW_I040NW_I020NW_015	48,30	2,00	30,00	25,05	76,65	26,90	1,60	25,00	2,52	29,70	26,90	1,60	29,70	25,05	1,48

Note: Body components begin with the code D.B.

SERIES 4000 ■ VALVE BODY DIMENSIONS

T valve

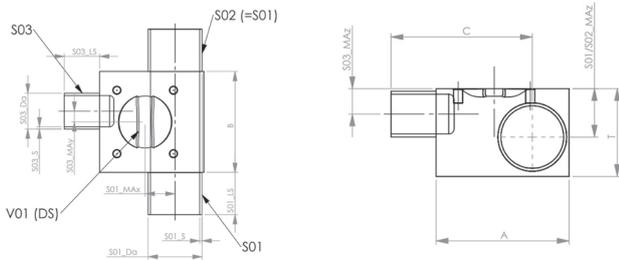


	S01/ S02					S03					A	B	T	Max	Weight [kg]	
	Da	S	LS	Max	C	Da	S	LS	Max	C						
ISO-1127 / DIN 11866 R-B																
0301TNL.XX.XX.V_I040NW_I040NW_I025NW_015	48,30	2,00	30,00	25,05	76,65	33,70	2,00	25,00	0,48	37,20	53,20	57,20	56,30	25,05	1,47	
0301TNL.XX.XX.V_I050NW_I050NW_I015NW_015	60,30	2,00	30,00	31,05	82,65	21,30	1,60	25,00	5,32	24,10	53,20	57,20	68,30	25,05	1,9	
0301TNL.XX.XX.V_I050NW_I050NW_I020NW_015	60,30	2,00	30,00	31,05	82,65	26,90	1,60	25,00	2,52	29,70	53,20	57,20	68,30	31,05	1,9	
0301TNL.XX.XX.V_I065NW_I065NW_I015NW_015	76,10	2,00	30,00	38,95	90,55	21,30	1,60	25,00	5,32	24,10	53,20	57,20	84,10	31,05	2,5	
0301TNL.XX.XX.V_I065NW_I065NW_I020NW_015	76,10	2,00	30,00	38,95	90,55	26,90	1,60	25,00	2,52	29,70	53,20	57,20	84,10	38,95	2,49	
0301TNL.XX.XX.V_I025NW_I025NW_I025NW_020	33,70	2,00	25,00	18,59	75,79	33,70	2,00	25,00	3,82	37,20	64,40	71,50	42,90	38,95	1,41	
0301TNL.XX.XX.V_I032NW_I032NW_I025NW_020	42,40	2,00	30,00	22,94	80,14	33,70	2,00	25,00	3,82	37,20	64,40	71,50	51,60	18,59	1,8	
0301TNL.XX.XX.V_I040NW_I040NW_I025NW_020	48,30	2,00	30,00	25,89	83,09	33,70	2,00	25,00	3,82	37,20	64,40	71,50	57,50	22,94	2,06	
0301TNL.XX.XX.V_I050NW_I050NW_I025NW_020	60,30	2,00	30,00	31,89	89,09	33,70	2,00	25,00	3,82	37,20	64,40	71,50	69,50	25,89	2,63	
0301TNL.XX.XX.V_I065NW_I065NW_I025NW_020	76,10	2,00	30,00	39,79	96,99	33,70	2,00	25,00	3,82	37,20	64,40	71,50	85,30	31,89	3,43	
0301TNL.XX.XX.V_I080NW_I080NW_I025NW_020	88,90	2,30	30,00	45,89	103,09	33,70	2,00	25,00	3,82	37,20	64,40	71,50	98,15	39,79	4,22	
0301TNL.XX.XX.V_I100NW_I100NW_I025NW_020	114,30	2,30	30,00	58,59	115,79	33,70	2,00	25,00	3,82	37,20	64,40	71,50	123,55	45,89	5,75	
0301TNL.XX.XX.V_I025NW_I025NW_I025NW_025	33,70	2,00	25,00	19,39	81,49	33,70	2,00	25,00	7,84	37,20	74,20	82,70	45,90	58,59	1,91	
0301TNL.XX.XX.V_I032NW_I032NW_I025NW_025	42,40	2,00	30,00	23,74	85,84	33,70	2,00	25,00	7,84	37,20	74,20	82,70	54,60	19,39	2,4	
0301TNL.XX.XX.V_I040NW_I040NW_I025NW_025	48,30	2,00	30,00	26,69	88,79	33,70	2,00	25,00	7,84	37,20	74,20	82,70	60,50	23,74	2,74	
0301TNL.XX.XX.V_I050NW_I050NW_I025NW_025	60,30	2,00	30,00	32,69	94,79	33,70	2,00	25,00	7,84	37,20	74,20	82,70	72,50	26,69	3,46	
0301TNL.XX.XX.V_I065NW_I065NW_I025NW_025	76,10	2,00	30,00	40,59	102,69	33,70	2,00	25,00	7,84	37,20	74,20	82,70	88,30	32,69	4,46	
0301TNL.XX.XX.V_I080NW_I080NW_I025NW_025	88,90	2,30	30,00	46,69	108,79	33,70	2,00	25,00	7,84	37,20	74,20	82,70	101,15	40,59	5,43	
0301TNL.XX.XX.V_I100NW_I100NW_I025NW_025	114,30	2,30	30,00	59,39	121,49	33,70	2,00	25,00	7,84	37,20	74,20	82,70	126,55	46,69	7,34	
0301TNL.XX.XX.V_I032NW_I032NW_I032NW_025	42,40	2,00	30,00	23,74	90,84	42,40	2,00	30,00	3,49	45,90	74,20	82,70	54,60	59,39	2,39	
0301TNL.XX.XX.V_I050NW_I050NW_I032NW_025	60,30	2,00	30,00	32,69	99,79	42,40	2,00	30,00	3,49	45,90	74,20	82,70	72,50	23,74	3,44	
0301TNL.XX.XX.V_I065NW_I065NW_I032NW_025	76,10	2,00	30,00	40,59	107,69	42,40	2,00	30,00	3,49	45,90	74,20	82,70	88,30	32,69	4,45	
0301TNL.XX.XX.V_I080NW_I080NW_I032NW_025	88,90	2,30	30,00	46,69	113,79	42,40	2,00	30,00	3,49	45,90	74,20	82,70	101,15	40,59	5,42	
0301TNL.XX.XX.V_I100NW_I100NW_I032NW_025	114,30	2,30	30,00	59,39	126,49	42,40	2,00	30,00	3,49	45,90	74,20	82,70	126,55	46,69	7,32	
0301TNL.XX.XX.V_I032NW_I032NW_I032NW_032	42,40	2,00	30,00	24,74	98,49	42,40	2,00	30,00	9,14	45,90	87,50	96,40	54,60	59,39	3,06	
0301TNL.XX.XX.V_I040NW_I040NW_I040NW_032	48,30	2,00	30,00	27,69	101,44	48,30	2,00	30,00	6,19	51,80	87,50	96,40	60,50	24,74	3,46	
0301TNL.XX.XX.V_I050NW_I050NW_I032NW_032	60,30	2,00	30,00	33,69	107,44	42,40	2,00	30,00	9,14	45,90	87,50	96,40	72,50	27,69	4,38	
0301TNL.XX.XX.V_I065NW_I065NW_I032NW_032	76,10	2,00	30,00	41,59	115,34	42,40	2,00	30,00	9,14	45,90	87,50	96,40	88,30	33,69	5,64	
0301TNL.XX.XX.V_I080NW_I080NW_I032NW_032	88,90	2,30	30,00	47,69	121,44	42,40	2,00	30,00	9,14	45,90	87,50	96,40	101,15	41,59	6,83	
0301TNL.XX.XX.V_I100NW_I100NW_I032NW_032	114,30	2,30	30,00	60,39	134,14	42,40	2,00	30,00	9,14	45,90	87,50	96,40	126,55	47,69	9,18	
0301TNL.XX.XX.V_I040NW_I040NW_I040NW_040	48,30	2,00	30,00	28,14	107,64	48,30	2,00	30,00	8,25	51,80	99,00	111,90	63,50	60,39	4,6	
0301TNL.XX.XX.V_I050NW_I050NW_I040NW_040	60,30	2,00	30,00	34,14	113,64	48,30	2,00	30,00	8,25	51,80	99,00	111,90	75,50	28,14	5,74	
0301TNL.XX.XX.V_I065NW_I065NW_I040NW_040	76,10	2,00	30,00	42,04	121,54	48,30	2,00	30,00	8,25	51,80	99,00	111,90	91,30	34,14	7,32	
0301TNL.XX.XX.V_I080NW_I080NW_I040NW_040	88,90	2,30	30,00	48,14	127,64	48,30	2,00	30,00	8,25	51,80	99,00	111,90	104,15	42,04	8,79	
0301TNL.XX.XX.V_I100NW_I100NW_I040NW_040	114,30	2,30	30,00	60,84	140,34	48,30	2,00	30,00	8,25	51,80	99,00	111,90	129,55	48,14	11,71	
0301TNL.XX.XX.V_I050NW_I050NW_I050NW_040	60,30	2,00	30,00	34,14	113,64	60,30	2,00	30,00	2,25	63,80	99,00	111,90	75,50	60,84	5,68	

Note: Body components begin with the code D.B.

SERIES 40000 ■ VALVE BODY DIMENSIONS

T valve

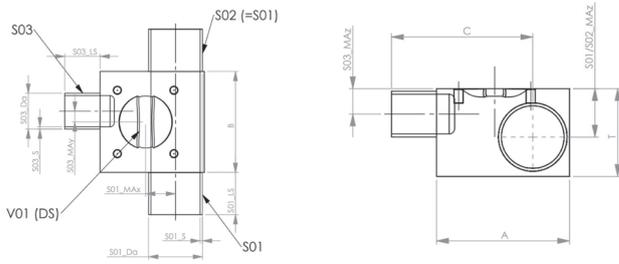

	S01/ S02					S03					A	B	T	Max	Weight [kg]
	Da	S	LS	Max	C	Da	S	LS	Max	C					

ISO-1127 / DIN 11866 R-B

0301TNL.XX.XX.V_I065NW_I065NW_I050NW_040	76,10	2,00	30,00	42,04	121,54	60,30	2,00	30,00	2,25	63,80	99,00	111,90	91,30	34,14	7,26
0301TNL.XX.XX.V_I080NW_I080NW_I050NW_040	88,90	2,30	30,00	48,14	127,64	60,30	2,00	30,00	2,25	63,80	99,00	111,90	104,15	42,04	8,74
0301TNL.XX.XX.V_I100NW_I100NW_I050NW_040	114,30	2,30	30,00	60,84	140,34	60,30	2,00	30,00	2,25	63,80	99,00	111,90	129,55	48,14	11,65
0301TNL.XX.XX.V_I050NW_I050NW_I050NW_050	60,30	2,00	30,00	35,38	123,88	60,30	2,00	30,00	8,56	63,80	117,00	133,90	77,50	60,84	7,71
0301TNL.XX.XX.V_I065NW_I065NW_I050NW_050	76,10	2,00	30,00	43,28	131,78	60,30	2,00	30,00	8,56	63,80	117,00	133,90	93,30	35,38	9,8
0301TNL.XX.XX.V_I080NW_I080NW_I050NW_050	88,90	2,30	30,00	49,38	137,88	60,30	2,00	30,00	8,56	63,80	117,00	133,90	106,15	43,28	11,71
0301TNL.XX.XX.V_I100NW_I100NW_I050NW_050	114,30	2,30	30,00	62,08	150,58	60,30	2,00	30,00	8,56	63,80	117,00	133,90	131,55	49,38	15,51
0301TNL.XX.XX.V_I065NW_I065NW_I065NW_050	76,10	2,00	30,00	43,28	131,78	76,10	2,00	30,00	0,66	79,60	117,00	133,90	93,30	62,08	9,7
0301TNL.XX.XX.V_I080NW_I080NW_I065NW_050	88,90	2,30	30,00	49,38	137,88	76,10	2,00	30,00	0,66	79,60	117,00	133,90	106,15	43,28	11,61
0301TNL.XX.XX.V_I100NW_I100NW_I065NW_050	114,30	2,30	30,00	62,08	150,58	76,10	2,00	30,00	0,66	79,60	117,00	133,90	131,55	49,38	15,41

Note: Body components begin with the code D.B.

SHUT-OFF DIAPHRAGM

■ AVAILABLE DIAPHRAGM SIZES

DS	010	015	020	025	032	040	050
----	-----	-----	-----	-----	-----	-----	-----

■ DIAPHRAGM MATERIAL

Diaphragm material			Code
EPDM	FDA + USP Class 6	Sterilisation temperature 140 °C / 180 min ¹	.E1
PTFE / EPDM	FDA + USP Class 6	Sterilisation temperature 150 °C ¹	.FE
PTFE / EPDM in two parts	FDA + USP Class 6	Sterilisation temperature 160 °C ¹	.SE

¹ Sterilisation temperature applies to saturated steam or superheated water.



.E1 = EPDM
DS 010 - DS 050



.FE = PTFE / EPDM
DS 010 - DS 050



.SE = PTFE / EPDM in two parts
DS 015 - DS 050


ACTUATOR

MANUAL ACTUATOR

Actuator	Code
Manual actuator, standard version	.MNN
Manual actuator, standard version with stainless steel handwheel	.MSN
Manual actuator, standard version with smooth stainless steel handwheel	.MSH
Handwheel actuator with spacer, without nut holder, smooth stainless steel handwheel	.HSH
Handwheel actuator with spacer, without nut holder, stainless steel handwheel	.HSN


Ambient temperature -10°C to 60°C and system pressure up to 10 bar.
Autoclavable up to 121°C.

Series 40000 ■ DIMENSIONS OF MANUAL ACTUATOR

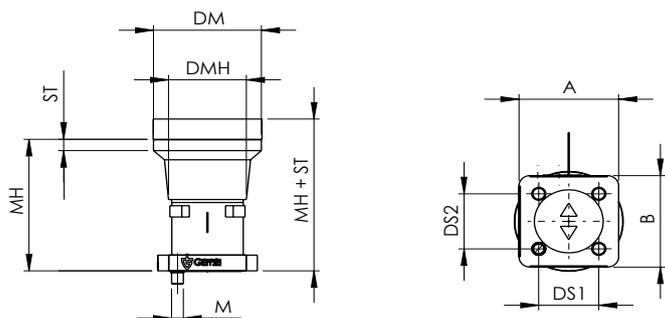

Type code	Diaphragm size DS		A	B	DS1	DS2	DM	DP	PH	PH2	MH	ST	C1	C2	M	Weight [kg]
Manual actuator .MNN																
010-.MNN-01	010		36,5	36,5	22,0	22,0	39,5	38,0	77,7	65,6	56,1	4,5	19,3	59,7	M4	0,16
015-.MNN-01	015		55,6	53,6	37,0	33,0	60,0	56,0	90,0	77,9	68,7	7,0	22,9	72,9	M5	0,5
020-.MNN-01	020		69,2	64,2	45,0	40,0	78,0	66,0	99,4	87,4	82,8	9,0	27,9	82,4	M6	0,95
025-.MNN-01	025		81,2	75,2	54,0	46,0	90,0	76,0	109,8	97,7	95,0	11,0	29,3	87,2	M8	0,95
032-.MNN-01	032		96,2	89,7	67,0	60,0	100,0	92,0	120,1	108,1	103,7	13,0	32,9	97,6	M8	1,7
040-.MNN-01	040		109,8	99,8	70,0	65,0	118,0	107,0	133,9	121,8	119,4	16,0	37,4	111,3	M10	2,26
050-.MNN-01	050		130,4	116,4	82,0	78,0	148,0	122,0	158,5	146,4	129,6	22,0	48,3	135,9	M12	3,74
Manual actuator .MSN																
010-.MSN-01	010		36,5	36,5	22,0	22,0	39,5	38,0	77,7	65,6	56,1	4,5	19,3	59,7	M4	0,16
015-.MSN-01	015		55,6	53,6	37,0	33,0	60,0	56,0	90,0	77,9	68,7	7,0	22,9	72,9	M5	0,5
020-.MSN-01	020		69,2	64,2	45,0	40,0	78,0	66,0	99,4	87,4	82,8	9,0	27,9	82,4	M6	0,95
025-.MSN-01	025		81,2	75,2	54,0	46,0	90,0	76,0	109,8	97,7	95,0	11,0	29,3	87,2	M8	0,95
032-.MSN-01	032		96,2	89,7	67,0	60,0	100,0	92,0	120,1	108,1	103,7	13,0	32,9	97,6	M8	1,7
040-.MSN-01	040		109,8	99,8	70,0	65,0	118,0	107,0	133,9	121,8	119,4	16,0	37,4	111,3	M10	2,26
050-.MSN-01	050		130,4	116,4	82,0	78,0	148,0	122,0	158,5	146,4	129,6	22,0	48,3	135,9	M12	3,74
Manual actuator .MSH																
010-.MSH-01	010		36,5	36,5	22,0	22,0	28,7	38,0	77,7	65,6	56,1	4,5	19,3	59,7	M4	0,16
015-.MSH-01	015		55,6	53,6	37,0	33,0	37,7	56,0	90,0	77,9	68,7	7,0	22,9	72,9	M5	0,5

Note: Drive components begin with the code D-AP-

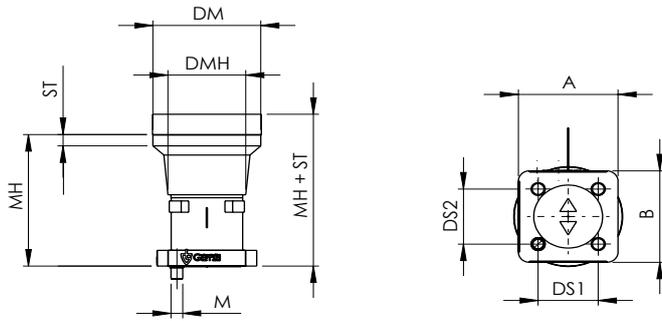

Type code	Diaphragm size DS		A	B	DS1	DS2	DM	DP	PH	PH2	MH	ST	C1	C2	M	Weight [kg]
Manual actuator .HSH																
010-.HSH-01	010		36,5	36,5	22,0	22,0	28,7	38,0	77,7	65,6	56,1	4,5	19,3	59,7	M4	0,16
015-.HSH-01	015		55,6	53,6	37,0	33,0	37,7	56,0	90,0	77,9	68,7	7,0	22,9	72,9	M5	0,5
Manual actuator .HSN																
010-.HSN-01	010		36,5	36,5	22,0	22,0	39,5	38,0	77,7	65,6	56,1	4,5	19,3	59,7	M4	0,16
015-.HSN-01	015		55,6	53,6	37,0	33,0	60,0	56,0	90,0	77,9	68,7	7,0	22,9	72,9	M5	0,5
020-.HSN-01	020		69,2	64,2	45,0	40,0	78,0	66,0	99,4	87,4	82,8	9,0	27,9	82,4	M6	0,95
025-.HSN-01	025		81,2	75,2	54,0	46,0	90,0	76,0	109,8	97,7	95,0	11,0	29,3	87,2	M8	0,95
032-.HSN-01	032		96,2	89,7	67,0	60,0	100,0	92,0	120,1	108,1	103,7	13,0	32,9	97,6	M8	1,7
040-.HSN-01	040		109,8	99,8	70,0	65,0	118,0	107,0	133,9	121,8	119,4	16,0	37,4	111,3	M10	2,26

Note: Drive components begin with the code D-AP-

ACTUATOR


■ PNEUMATIC ACTUATOR

Actuator	Code
Pneumatic actuator NC (spring-to-close) PS 10 bar Pst 4.5 bar -7 bar	.CNN
Pneumatic actuator NO (spring-to-open) PS 10 bar Pst 4.5 bar -6 bar	.ONN
Pneumatic actuator NC compact version (spring-to-close) PS 6 bar Pst 5.5 bar -7 bar	.RNN




Control medium for pneumatic drives: neutral gases such as compressed air 4.5 bar or 5.5 bar at a maximum of 60°C.
Ambient temperature -10°C to 60°C and system pressure up to 10 bar.

Series 40000 ■ DIMENSIONS OF PNEUMATIC ACTUATOR

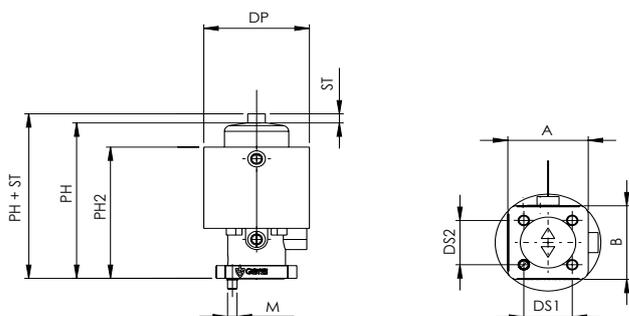

Type code	Diaphragm size DS	Options	A	B	DS1	DS2	DP	PH	PH2	ST	M	Control air connection	Weight [kg]	Air volume [cm³]
Pneumatic actuator CNN														
010-.CNN-01	010	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	36,5	36,5	22,0	22,0	48,0	77,2	65,1	4,5	M4	M5	0,5	14
015-.CNN-01	015	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	55,6	53,6	37,0	33,0	66,0	90,5	78,5	7,0	M5	M5	0,9	38
020-.CNN-01	020	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	69,2	64,2	45,0	40,0	76,0	100,2	88,2	9,0	M6	M5	1,4	58
025-.CNN-01	025	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	81,2	75,2	54,0	46,0	92,0	115,5	103,4	11,0	M8	G1/8	2,3	93
032-.CNN-01	032	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	96,2	89,7	67,0	60,0	107,0	127,4	115,3	13,0	M8	G1/8	3,3	153
040-.CNN-01	040	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	109,8	99,8	70,0	65,0	122,0	144,3	132,2	16,0	M10	G1/8	4,7	222
050-.CNN-01	050	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	130,4	116,4	82,0	78,0	148,0	163,6	151,5	22,0	M12	G1/8	7,3	416
Pneumatic actuator ONN														
010-.ONN-01	010	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	36,5	36,5	22,0	22,0	38,0	77,7	65,6	4,5	M4	M5	0,3	9
015-.ONN-01	015	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	55,6	53,6	37,0	33,0	56,0	90,0	77,9	7,0	M5	M5	0,6	40
020-.ONN-01	020	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	69,2	64,2	45,0	40,0	66,0	99,4	87,4	9,0	M6	M5	0,9	70
025-.ONN-01	025	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	81,2	75,2	54,0	46,0	76,0	109,8	97,7	11,0	M8	M5	1,3	95
032-.ONN-01	032	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	96,2	89,7	67,0	60,0	92,0	120,1	108,1	13,0	M8	G1/8	2,0	152
040-.ONN-01	040	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	109,8	99,8	70,0	65,0	107,0	133,9	121,8	16,0	M10	G1/8	2,7	247
050-.ONN-01	050	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	130,4	116,4	82,0	78,0	122,0	158,5	146,4	22,0	M12	G1/8	4,2	487

Note: Drive components begin with the code D-AP-

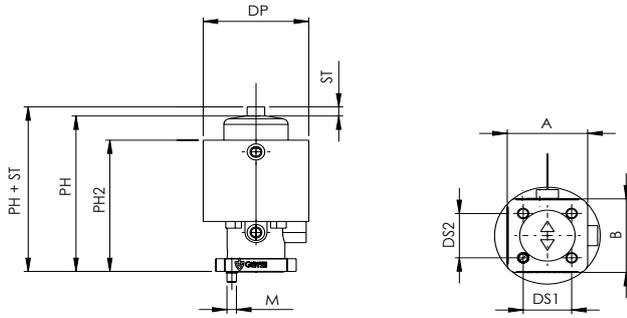

Type code	Diaphragm size DS	Options	A	B	DS1	DS2	DP	PH	PH2	ST	M	Control air connection	Weight [kg]	Air volume [cm³]
Pneumatic actuator RNN														
010-.RNN-01	010	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	36,5	36,5	22,0	22,0	38,0	77,7	65,6	4,5	M4	M5	0,4	7
015-.RNN-01	015	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	55,6	53,6	37,0	33,0	56,0	90,0	77,9	7,0	M5	M5	0,8	26
020-.RNN-01	020	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	69,2	64,2	45,0	40,0	66,0	99,4	87,4	9,0	M6	M5	1,1	42
025-.RNN-01	025	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	81,2	75,2	54,0	46,0	76,0	109,8	97,7	11,0	M8	G1/8	1,6	65
032-.RNN-01	032	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	96,2	89,7	67,0	60,0	92,0	120,1	108,1	13,0	M8	G1/8	2,5	104
040-.RNN-01	040	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	109,8	99,8	70,0	65,0	107,0	133,9	121,8	16,0	M10	G1/8	3,6	173
050-.RNN-01	050	Stroke limiter, seal adjuster, El.Po.Indicator, Controller, Combi switchbox	130,4	116,4	82,0	78,0	122,0	158,5	146,4	22,0	M12	G1/8	5,4	283

Note: Drive components begin with the code D-AP-

D.V0301TNL.3L.8N.V _ A015NW _ A015NW _ A010NW _ 010.E1.MNN

SERIES 40000


Valve body housing	
D	Product group
.V	Complete valve
03	Connections
01	Valve functions
TNL	Variant / Version of the fitting
.3L	Material
.8N	Surface
.S	Semi-finished product

Connection S01	
A	Pipe standard
015	Nominal width
N	Connection length
W	Connection

Connection S02	
A	Pipe standard
015	Nominal width
N	Connection length
W	Connection

Connection S03	
A	Pipe standard
010	Nominal width
N	Connection length
W	Connection

Actuator and diaphragms	
010	Diaphragm size
.E1	Diaphragm material
.MNN	Actuator

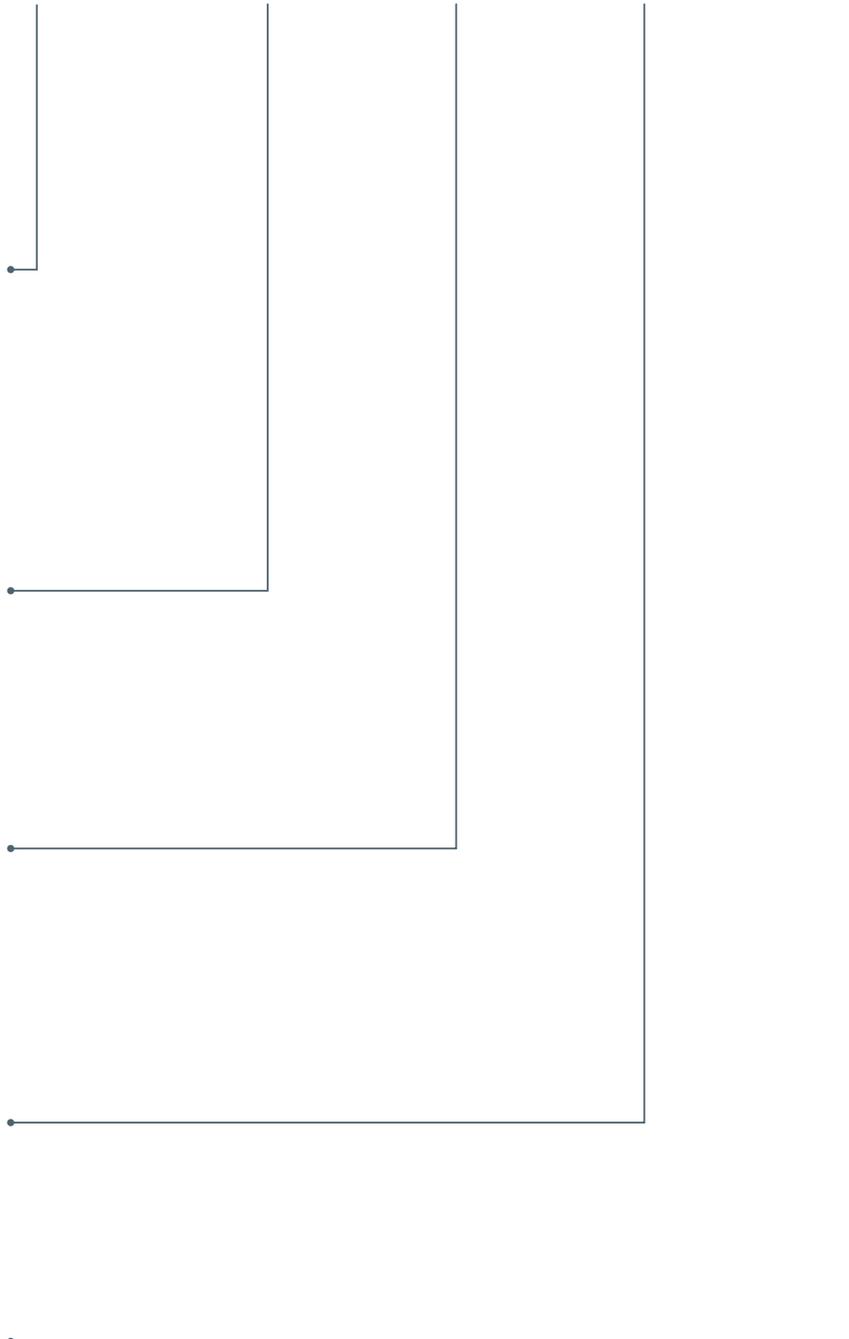

Series 40000 ■ INDIVIDUAL SELECTION | VALVE BODY

Product group	Component	Number of connections	Number of valve functions	Variant	Material valve body	Surface quality valve body	Manufacturing process / semi-finished product
D	.V	03	01	TNL	.3L	.8N	.S
D	.V	03	01	TNL	.3L	.8E	.S
D	.V	03	01	TNL	.3L	.4N	.S
D	.V	03	01	TNL	.3L	.4E	.S
D	.V	03	01	TNL			
D	.V	03	01	TNL			

Series 40000 ■ INDIVIDUAL SELECTION | VALVE BODY / CONNECTION

Nozzle	Pipe nominal diameter	Nominal diameter	Length	Connection
S01	.A	015	N	W
S02	.E	020	S	D
S03	.A	010	N	W

Series 40000 ■ INDIVIDUAL SELECTION | DIAPHRAGM & ACTUATOR

DS Diaphragm size	Diaphragm material	Type of actuator
010	.E1	.CNN
020	.FE	.MNN

■ OPTIONS

Labelling on request	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>

■ CERTIFICATES / APPROVALS

C50	Consists of cover sheet, 2.1 certificate, MPZ 3.1 body, 2.2 pressure, Conf. EU, proof(s) membrane	<input checked="" type="checkbox"/>	<input type="checkbox"/>
C51	Tool certificate 2.2 – Roughness according to DIN EN 10204	<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>

■ ENQUIRY

Copy and send to: order@goetze.de.

→ Specification sheet

T-valve D.V0301TNL | Product group 40000

GOE project:		GOE item number:		
Date:				
Customer/ interested person	Address	Contact	Project/order	Comments

Valve specification											
Delivery date w/b			System pressure		Temp- Max	Temp- Sterile	Temp- Min	Vacuum	Steam insert	Media	
Product group 40000	D	Diaphragm valve	PS [bar]	Pst [bar]	Tmax [C]	Tst [C]	Tmin [C]	[%]	[%]		
<input type="checkbox"/> On-off valve <input type="checkbox"/> Control valve											
Order code	D.V0301TNL										
Product	.V	Valve					D.V0301TNL 				
Number of connections	03										
Number of valve functions	01										
Variant 1	T	T-valve									
Variant 2	N	Standard									
Variant 3	L	Left version									
Body material											
Inner surface (medically exposed)											
Semi-finished product											

Connections				
	S01	S02	S03	
Pipe standard				
DN				
Connection length				
Connection				
Connection code				

Valve functions		V01
Diaphragm size		
Sealing material		
Actuator		
Actuator_Option1		
Actuator_Option2		
Function code		
Key		

Contact	Goetze KG Armaturen	Email	Phone	Robert-Mayer-Straße 21 71636 Ludwigsburg
----------------	----------------------------	--------------	--------------	---

Comments: